

# BAT 600


## Linear Batten Light

The BAT is designed as an all rounded linear surface mounted luminaire. Featuring a high efficiency diffuser and an in-built CCT Switch function, the BAT is a very versatile luminaire that provides a uniform light output over a large area, making it ideal for generic illumination in any interior space.




<b>Electrical Specifications</b>	Power Consumption Input Voltage Range Driver / Power Supply Dimming	20 Watts 220VAC – 240VAC Integrated Control Gear No
<b>Optical Specifications</b>	Luminous Output@5000K Colour Temperature CRI Beam Angle Light Source	2200lm 3000K / 4000K / 5000K (Adjustable) 80 Ra 120° SMD LED
<b>Physical Specifications</b>	Product Dimensions (mm) Install Method Finish Optics Material IP Rating Weight (kg)	L600 x W72 x H38 Surface Mounted White PC Lens IP40 0.39
<b>Operating Specifications</b>	Ambient Temperature Product Lifespan Warranty	-20°C ~ +40°C 35,000 Hours 2 Years

### Dimensions & Photometry Diagram



A (mm)	B (mm)	C (mm)
600	72	38

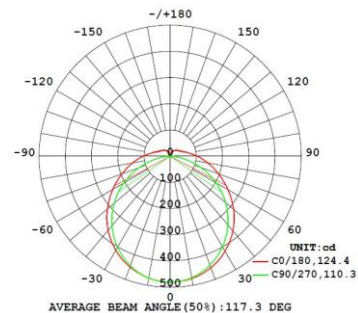

### Order Information

Name	- Watt	Dimming	- CCT	Angle	- Size	Finish
<input type="checkbox"/> BAT	<input type="checkbox"/> 20	<input type="checkbox"/> ND	<input type="checkbox"/> 3CT	<input type="checkbox"/> 120D	<input type="checkbox"/> T0600	<input type="checkbox"/> W (White)

Sample Code: BAT-20ND-3CT120D-T0600W

Order Code:

### PROJECT

Name:  
Reference:  
Quantity:

Notes: