

HAWK 16



LED Commercial Downlight Series

The HAWK series is a family of premium downlights designed to introduce elegance as well as advanced illumination into commercial settings. This luminaire features a high-power LED chip and a high chrome reflector assembly designed to maximize dispersion as well as produce a sparkle effect when lit. These properties make the HAWK an ideal luminaire for retail and hospitality lighting applications.



Electrical Specifications	Power Consumption Input Voltage Range Driver / Power Supply Dimming	16 Watts 220VAC – 240VAC External Control Gear Triac / DALI
Optical Specifications	Luminous Output Colour Temperature CRI Beam Angle Light Source	1360lm / 1440lm / 1520lm 3000K / 4000K / 5000K 90 Ra 80° COB LED
Physical Specifications	Product Dimensions (mm) Cut-Out (mm) Face Finish Optics Material IP Rating Adjustable	D140 x H73 Φ125 White Semi Frosted Lens IP44 No
Operating Specifications	Ambient Temperature Product Lifespan Warranty	-10°C ~ +40°C 35,000 Hours 5 Years

Dimensions & Photometry Diagram

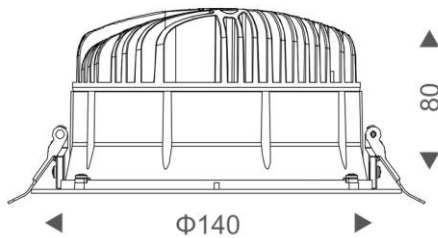

h(m)	E(lx)	D(mm)
		100°
1.0	1121	1880
2.0	280	3760
3.0	124	5640

Order Information

Name	- Watt	Dimming	- CCT	Angle	- Size	Finish
<input type="checkbox"/> HAWK	<input type="checkbox"/> 16	<input type="checkbox"/> PD (Triac) <input type="checkbox"/> DA (DALI)	<input type="checkbox"/> 30K <input type="checkbox"/> 40K <input type="checkbox"/> 50K	<input type="checkbox"/> 80D	<input type="checkbox"/> R0140	<input type="checkbox"/> W (White)

Sample Code: HAWK-16PD-30K80D-R0140W

Order Code:

PROJECT

Name:
Reference:
Quantity:

Notes: