

MOD RECESSED



LED Commercial Downlight Series

The MOD 25 RECESSED is a commercial spotlighting solution designed to rival the performance of traditional AR111 spot lights. Designed as a multipurpose lighting solution, the MOD module is here combined with a recessed housing, giving it the appearance of a minimalist downlight while delivering illumination to the intended space.



Electrical Specifications	Power Consumption Input Voltage Range Driver / Power Supply Dimming	25 Watts 220VAC – 240VAC External Control Gear Triac / DALI
Optical Specifications	Luminous Output Colour Temperature CRI Beam Angle Light Source	2125lm / 2250lm / 2375lm 3000K / 4000K / 5000K 90 Ra 40° COB LED
Physical Specifications	Product Dimensions (mm) Cut-Out (mm) Face Finish Optics Material IP Rating Adjustable	D145 x H56 Φ140 White Semi Frosted Lens IP20 Yes
Operating Specifications	Ambient Temperature Product Lifespan Warranty	-10°C ~ +40°C 35,000 Hours 2 Years

Dimensions & Photometry Diagram

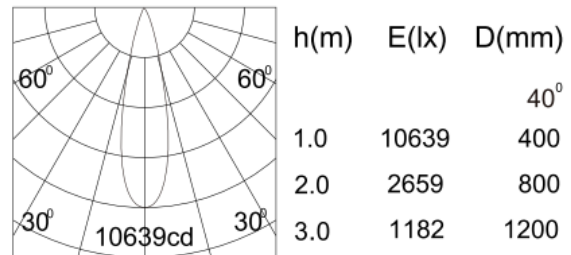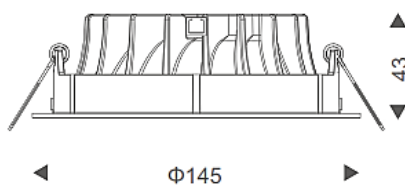

Order Information

Name	-	Watt	Dimming	-	CCT	Angle	/	Trim Name	-	Size	Finish
<input type="checkbox"/> MOD		<input type="checkbox"/> 25	<input type="checkbox"/> PD (Triac) <input type="checkbox"/> DA (DALI)		<input type="checkbox"/> 30K <input type="checkbox"/> 40K <input type="checkbox"/> 50K	<input type="checkbox"/> 40D		<input type="checkbox"/> TRIM.R		<input type="checkbox"/> RA0145W	<input type="checkbox"/> W (White)

Sample Code: MOD-25PD-30K40D / TRIM.R-RA0145W

Order Code:

PROJECT

Name:
Reference:
Quantity:

Notes: